


#### Dimensions and Loads

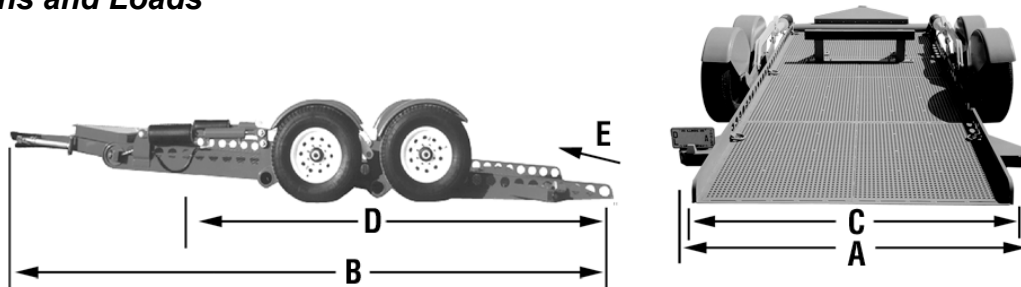

\*Model shown with brace removed.

#### Dimensions:

A = 8' 6" (102")  
B = 22' 1" (265.0")  
C = 6' 2" (74")  
D = 16' (192")  
E = 4 Degree Load Angle  
Clearance of deck at transport height = 11.5"

#### Loads:

700 lbs Tongue Load (Trailer)  
800 lbs Tongue Load (Cargo)  
1500 lbs Total Tongue Load  
800 lbs Wheel Load (Trailer)  
2675 lbs Wheel Load (Cargo)  
3475 lbs Total Wheel Load  
Two (2), 7000 lb Axles

#### Specifications and Features (Base Trailer)

Ground to Travel Height  
GVWR 15400 lbs  
Payload Maximum 11500 lbs  
Trailer Weight 3900 lbs  
3.0 to 1 Payload to Trailer Weight Ratio  
Tires ST235/80R16LRE  
Cylinders 3.5" Diameter x 12" Stroke  
Adjustable Hitchball 2 5/16" Diameter  
Ramp Built-in  
Larger Lockable Storage Compartment  
Controlled Descent  
Star Traction Flooring  
Tie Down Rail Built-in

Removable Stop / Brace  
DC Electric/Hydraulic Pump  
Tongue Jack  
Six (6) "D" Rings  
Breakaway Kit with Chains  
Electric Brakes Both Axles  
LED Lighting with 7 Pin Connector  
2 Pin +12 VDC and Ground  
Control Switch with Cable  
HSLA Steel Construction (No Angle or Channel Iron)  
Combination Hydraulic/Rubber Suspension

#### Options

On Board Power – Battery, Charger & Maintainer  
Cargo Winch 8500#  
Pintle Hitch (2-1/2" Lunette)

Spare Tire, Wheel & Carrier  
Special Paint (True Blue is Standard)