


Dimensions and Loads

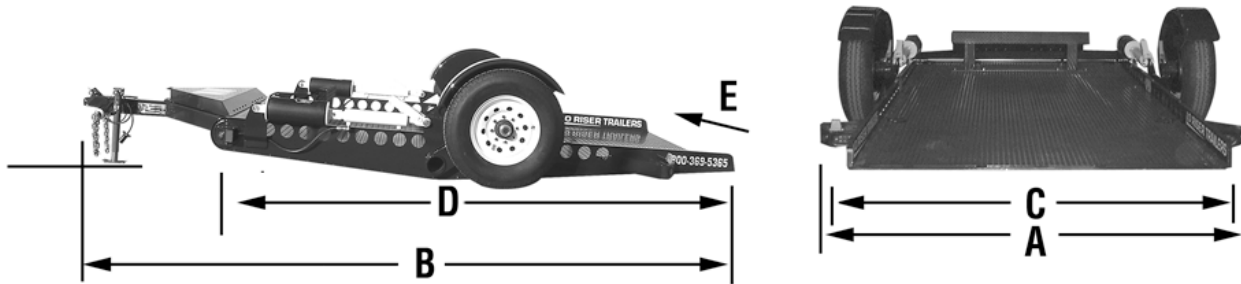

Dimensions:

A = 8' 6" (102")
B = 16' 3" (195")
C = 6' 2" (74")
D = 11' 4" (136")
E = 5 Degree Load Angle
Clearance of deck at transport height = 11.5"

Loads:

600 lbs Tongue Load (Trailer)
500 lbs Tongue Load (Cargo)
1100 lbs Total Tongue Load
950 lbs Wheel Load (Trailer)
2550 lbs Wheel Load (Cargo)
3500 lbs Total Wheel Load
One (1), 7000 lb Axle

Specifications and Features (Base Trailer)

Ground to Travel Height
GVWR 8100 lbs
Payload Maximum 5600 lbs
Trailer Weight 2500 lbs
2.24 to 1 Payload to Trailer Weight Ratio
Tires ST235/80R16LRE
Cylinders 3" Diameter x 12" Stroke
Adjustable Hitchball 2-5/16" Diameter
Ramp Built-in
Lockable Storage Compartment
Controlled Descent
Star Traction Flooring
Tie Down Rail Built-in

Removable Stop / Brace
DC Electric/Hydraulic Pump
Tongue Jack
Four (4) "D" Rings
Breakaway Kit with Chains
Electric Brakes
LED Lighting with 7 Pin Connector
2 Pin +12 VDC and Ground
Control Switch with Cable
HSLA Steel Construction (No Angle or Channel Iron)
Combination Hydraulic/Rubber Suspension

Options

On Board Power – Battery, Charger & Maintainer
Cargo Winch 3700#
Pintle Hitch (2-1/2" Lunette)

Aluminum Wheels
Spare Tire, Wheel & Carrier
Special Paint (True Blue is Standard)