
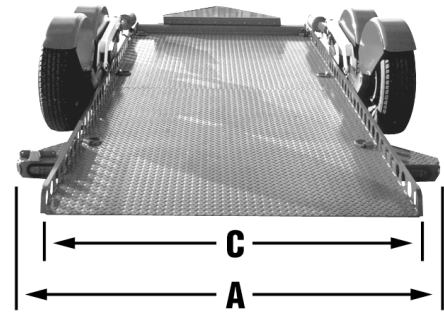


Dimensions and Loads

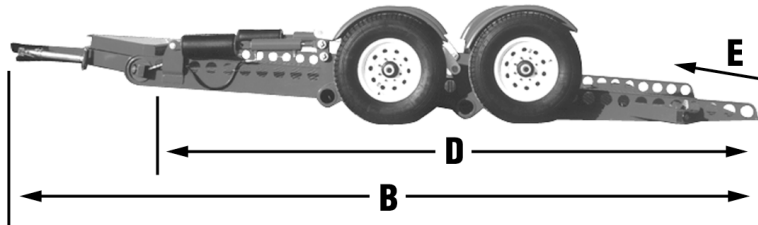

Dimensions:

A = 8' 6" (102")
B = 22' 1" (265.0")
C = 6' 2" (74")
D = 16' (192")
E = 4 Degree Load Angle
Clearance of deck at transport height = 11"

Loads:

600 lbs Tongue Load (Trailer)
800 lbs Tongue Load (Cargo)
1400 lbs Total Tongue Load
700 lbs Wheel Load (Trailer)
2300 lbs Wheel Load (Cargo)
3000 lbs Total Wheel Load
Two (2), 6000 lb Axles

Specifications and Features (Base Trailer)

Ground to Travel Height
GVWR 13400 lbs
Payload Maximum 10000 lbs
Trailer Weight 3400 lbs
3 to 1 Payload to Trailer Weight Ratio
Tires LT235/85R16LRE (3040 lbs Capacity Each)
Cylinders 3.5" Diameter x 12" Stroke
Adjustable Hitchball 2-5/16" Diameter
Ramp Built-in
Larger Lockable Storage Compartment
Controlled Descent
Tie Down Rail Built-in

DC Electric/Hydraulic Pump
Tongue Jack
Six (6) "D" Rings
Breakaway Kit with Chains
Electric Brakes Both Axles
LED Lighting with 7 Pin Connector
Single Pin Grounded 12 VDC Power Cable
Control Switch with Cable
HSLA Steel Construction (No Angle or Channel Iron)
Grade 55 - 3/16" Diamond Plate Flooring
Combination Hydraulic/Rubber Suspension

Options

On Board Power – Battery, Charger & Maintainer
Cargo Winch 8500#
Pintle Hitch (2-1/2" Lunette)

Aluminum Wheels
Spare Tire, Wheel & Carrier
Special Paint (True Blue is Standard)