
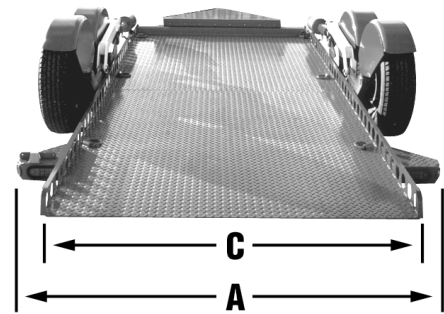


#### Dimensions and Loads

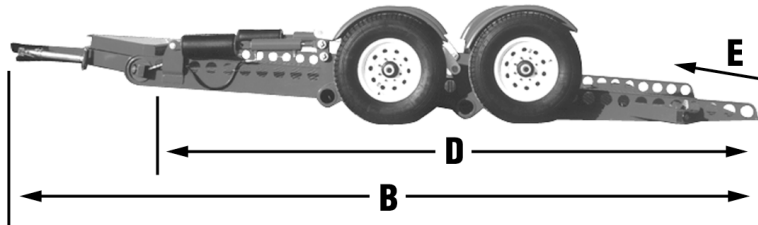

#### Dimensions:

A = 8' 6" (102")  
B = 22' 1" (265.0")  
C = 6' 2" (74")  
D = 16' (192")  
E = 4 Degree Load Angle  
Clearance of deck at transport height = 11"

#### Loads:

600 lbs Tongue Load (Trailer)  
800 lbs Tongue Load (Cargo)  
1400 lbs Total Tongue Load  
700 lbs Wheel Load (Trailer)  
2800 lbs Wheel Load (Cargo)  
14000 lbs Total Wheel Load  
Two (2), 7000 lb Axles

#### Specifications and Features (Base Trailer)

Ground to Travel Height  
GVWR 15400 lbs  
Payload Maximum 12000 lbs  
Trailer Weight 3400 lbs  
3.5 to 1 Payload to Trailer Weight Ratio  
Tires ST235/80R16LRE (3520 lbs Capacity Each)  
Cylinders 3.5" Diameter x 12" Stroke  
Adjustable Hitchball 2-5/16" Diameter  
Ramp Built-in  
Larger Lockable Storage Compartment  
Controlled Descent  
Tie Down Rail Built-in

DC Electric/Hydraulic Pump  
Tongue Jack  
Six (6) "D" Rings  
Breakaway Kit with Chains  
Electric Brakes Both Axles  
LED Lighting with 7 Pin Connector  
Single Pin Grounded 12 VDC Power Cable  
Control Switch with Cable  
HSLA Steel Construction (No Angle or Channel Iron)  
Grade 55 - 3/16" Diamond Plate Flooring  
Combination Hydraulic/Rubber Suspension

#### Options

On Board Power – Battery, Charger & Maintainer  
Cargo Winch 8500#  
Pintle Hitch (2-1/2" Lunette)

Spare Tire, Wheel & Carrier  
Special Paint (True Blue is Standard)