


**Dimensions and Loads**

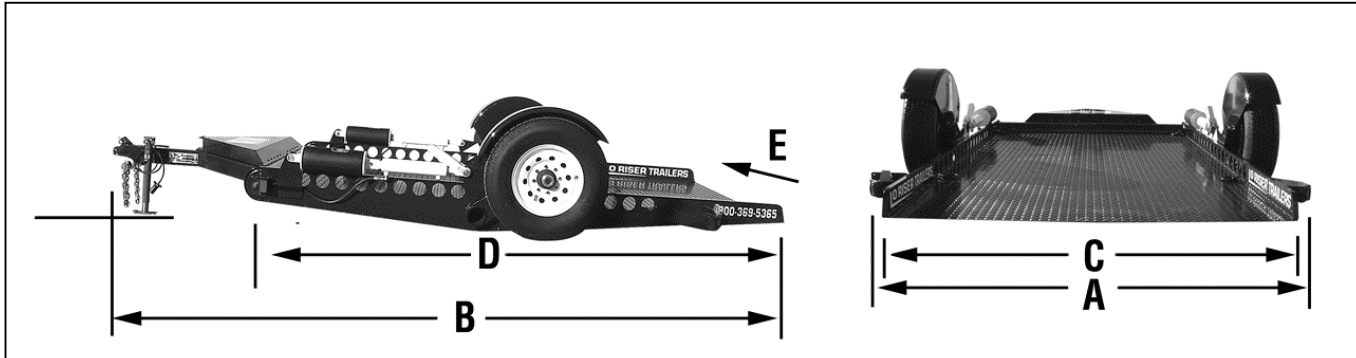

**Dimensions:**

- A = 8' 6" (102")
- B = 16' 3" (195")
- C = 6' 2" (74")
- D = 11' 4" (136")
- E = 5 Degree Load Angle
- Clearance of deck at transport height = 11.5"

**Loads:**

- 475 lbs Tongue Load (Trailer)
- 625 lbs Tongue Load (Cargo)
- 1100 lbs Total Tongue Load
- 813 lbs Wheel Load (Trailer)
- 2687 lbs Wheel Load (Cargo)
- 3500 lbs Total Wheel Load
- One (1), 7000 lb Axle

**Specifications and Features**

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>Ground to Travel Height</li> <li>GVWR 8100 lbs</li> <li>Payload Maximum 6000 lbs</li> <li>Trailer Weight 2100 lbs</li> <li>3.0 to 1 Payload to Trailer Weight Ratio</li> <li>Tires ST235/80R16LRE (3500 lbs Capacity Each)</li> <li>Cylinders 3" Diameter x 12" Stroke</li> <li>Adjustable Hitchball 2 5/16" Diameter</li> <li>Ramp Built-in</li> <li>Lockable Storage Compartment</li> <li>Controlled Descent</li> <li>Tie Down Rail Built-in</li> </ul> | <ul style="list-style-type: none"> <li>DC Electric/Hydraulic Pump</li> <li>Tongue Jack</li> <li>Four (4) "D" Rings</li> <li>Breakaway Kit with Chains</li> <li>Electric Brakes</li> <li>LED Lighting with 7 Pin Connector</li> <li>Single Pin Grounded 12 VDC Power Cable</li> <li>Control Switch with Cable</li> <li>HSLA Steel Construction (No Angle or Channel Iron)</li> <li>Combination Hydraulic/Rubber Suspension</li> </ul> |
|--|--|

**Options**

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>On Board Power – Battery, Charger &amp; Maintainer</li> <li>Cargo Winch 3700#</li> <li>Pintle Hitch</li> </ul> | <ul style="list-style-type: none"> <li>Aluminum Wheels</li> <li>Spare Tire, Wheel &amp; Carrier</li> <li>Special Paint (True Blue is Standard)</li> </ul> |
|---|---|